

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)


PCT

(10) International Publication Number
WO 2004/020734 A1

- (51) International Patent Classification⁷: **D21F 1/00** (74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2, FIN-00100 Helsinki (FI).
- (21) International Application Number: **PCT/FI2003/000622** (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 26 August 2003 (26.08.2003) (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data: 20021534 28 August 2002 (28.08.2002) FI
- (71) Applicant (*for all designated States except US*): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **POIKOLAINEN, Antti** [FI/FI]; Ritopohjantie 5, FIN-40250 Jyväskylä (FI). **NÄRVÄINEN, Aimo** [FI/FI]; Ilveksenpolku 4, FIN-40270 Palokka (FI).

[Continued on next page]

(54) Title: ARRANGEMENT FOR A WIRE SECTION OF A PAPER OR BOARD MACHINE

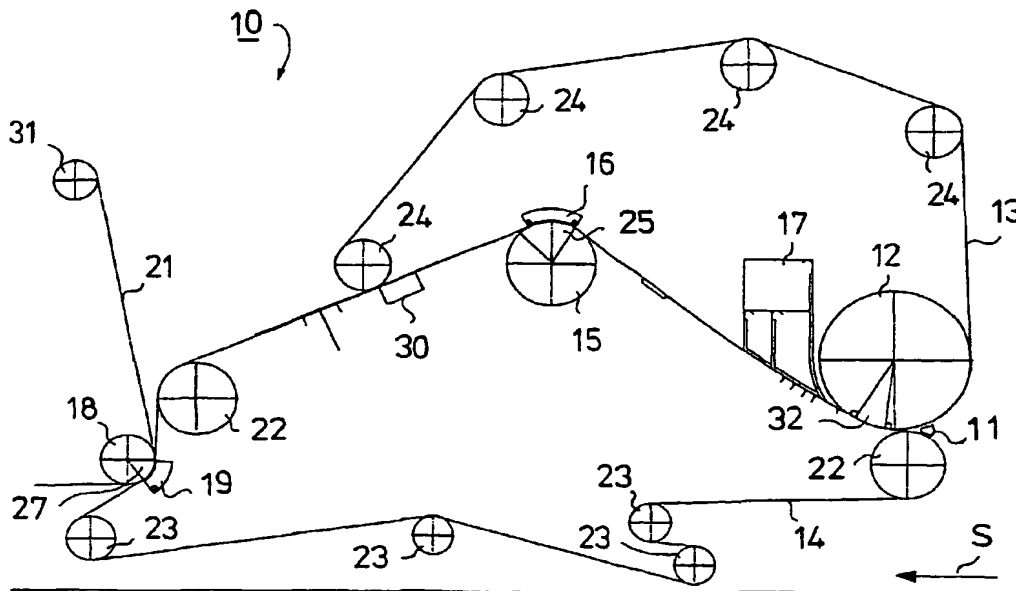

(57) Abstract: The invention relates to an arrangement for a wire section of a paper or board machine, in which a web is formed between two wire loops (13, 14), in connection with which dewatering elements (12, 17, 15, 28) are placed and in which water is drained from a stock suspension from between said two wires (13, 14). In the region of a twin-wire zone, a suction roll (15) is placed within one wire loop and a suction box (16) having a curved surface is situated in opposed relationship with the suction roll (15) on the side of the other wire loop. After the suction box (16), the web is guided, due to the effect of a vacuum of the suction roll (15), forwards on the surface of the wire loop on the side of the suction roll (15).